

Curtain Fire Damper

4½" Deep • 1½ Hour • Static - Horizontal Mount • Dynamic - Vertical Mount • Fire Damper

STANDARD CONSTRUCTION

- FRAME:** 20-GA galvanized steel for dampers ≤ 10" diameter
16-GA galvanized steel for dampers ≥ 11" diameter
- BLADE:** Stainless steel curtain type
- FUSIBLE LINK:** UL-Listed 165°F; Replaceable
- FINISH:** Mill

UNDERWRITERS LABORATORIES, INC.®

CLASSIFIED FIRE DAMPERS

FIRE RESISTANCE RATING 1½ HR.



FILE #R16591



OPTIONS

212°F Fusible Link
Retaining Angle Rings (sizes 8" - 14")

NOTES



1. Dampers are provided ¼" undercut.
2. Dampers available in 1" increments only.
3. Dampers are static rated on horizontally and vertically mounted dampers.
4. Damper are dynamically rated on vertically mounted dampers only.

DAMPER SIZE


Panels	Min Panel	Max Single Panel
S3	4" dia.	14" dia.

This fire damper meets the construction and performance requirements of:

- Underwriters Laboratories Inc. Standard 555
- National Fire Protection Association Standard 80 and 90A
- California State Fire Marshal Listing #3225-0412:002
- Underwriters Laboratories Inc. Approved for dual direction airflow and dynamic conditions and dynamic closure conditions for vertical mount and static closure conditions for horizontal mount
- Underwriters Laboratories Inc. Classified for use in fire resistive ratings of less than 3 hours.

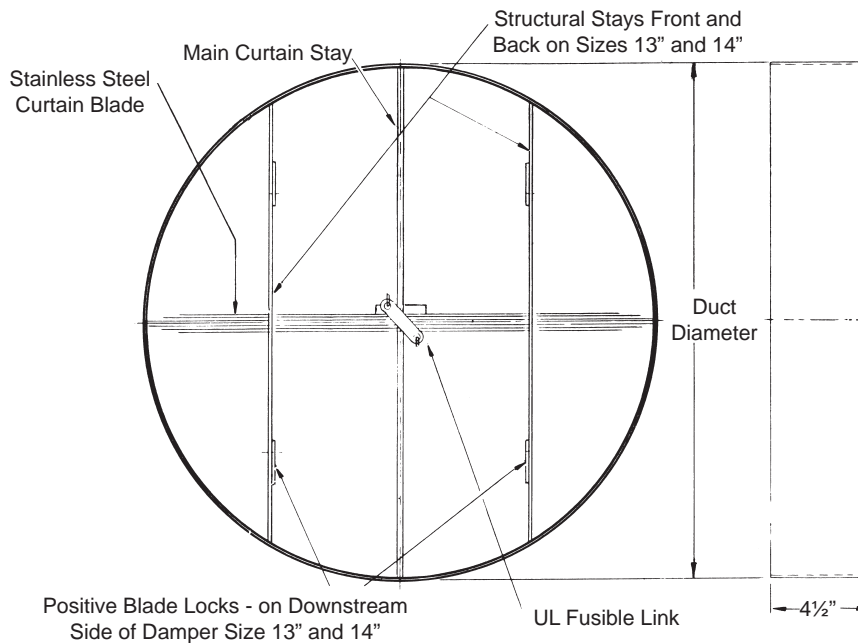

Open Position



Closed Position

This page intentionally left blank.