

Extruded Aluminum Louver

EL47A

4" Deep • Non-Drainable • Adjustable Blade Louver

STANDARD CONSTRUCTION

- FRAME:** .080" thick nominal; 6063-T6/T52 extruded aluminum alloy
- BLADES:** .080" thick nominal; 6063-T6/T52 extruded aluminum alloy
- FACE OF LOUVER:** Full width sill with drain head and non-drain blades contained within the drain jambs.
- LINKAGE:** Extruded aluminum, concealed in channel out of airstream. Pivots are .50 dia. machined steel. Cadmium plated and chromate treated. Pivots rotate in a celcon bearing. A .312" dia. Aluminum linkage rod is locked to the pivot by a 1/4 - 20 set screw with epoxy locking patch.
- SHAFT:** .50 DIA. ALUMINUM "Pin-Lock" Rod.
- BLADE SEALS:** Extruded silicone rubber seal at blade edge.
- JAMB SEALS:** Polyurethane
- SCREEN:** 1/2" x .051" flattened aluminum birdscreen
- FINISH:** Mill

OPTIONS


- Finish - Baked Powder Polyester, Kynar, or Anodize
- Variety of Bird and Insect Screen
- 1 3/8" Usable Flange Frame (Front Face Only)
- Blank-off Panels
- Actuators (Electric, Pneumatic, Manual, etc.)

NOTES


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately 1/2" undercut.
2. Shipping weight approximately 5.0 lbs./sq.ft.

LOUVER SIZE


Panels	Min Panel	Max Single Panel
EL47A	12"W x 12"H	48"W x 96"H

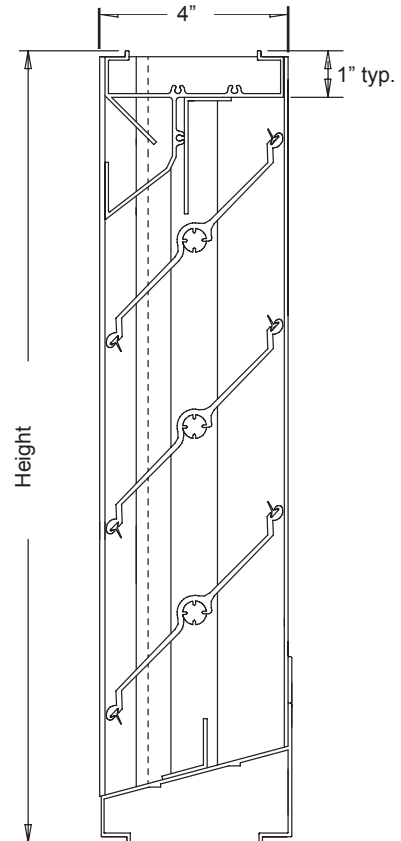

Section View





Optional Flange Frame

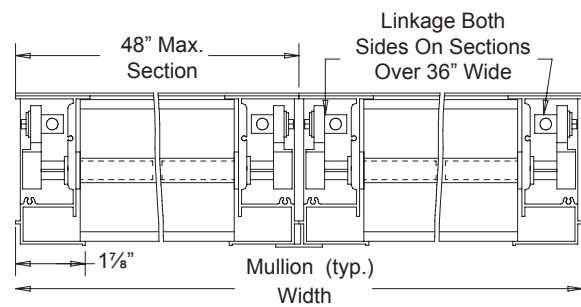

Water Penetration: 1000 fpm maximum free area velocity
 Pressure Drop: 0.16 in.wg at 1000 fpm and 7141 scfm
 Free Area: 6.84 sq.ft. = 43% for 48"W x 48"H test size

Ratings do not include effects of birdscreen

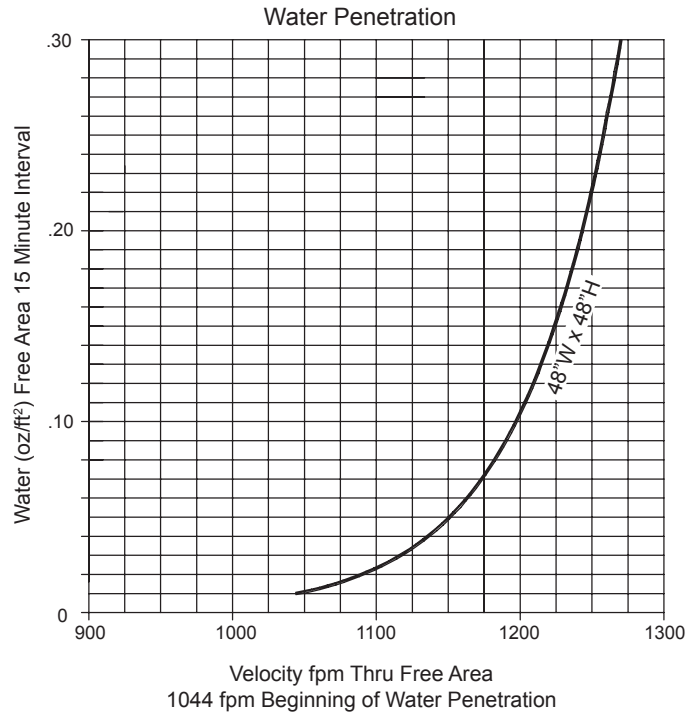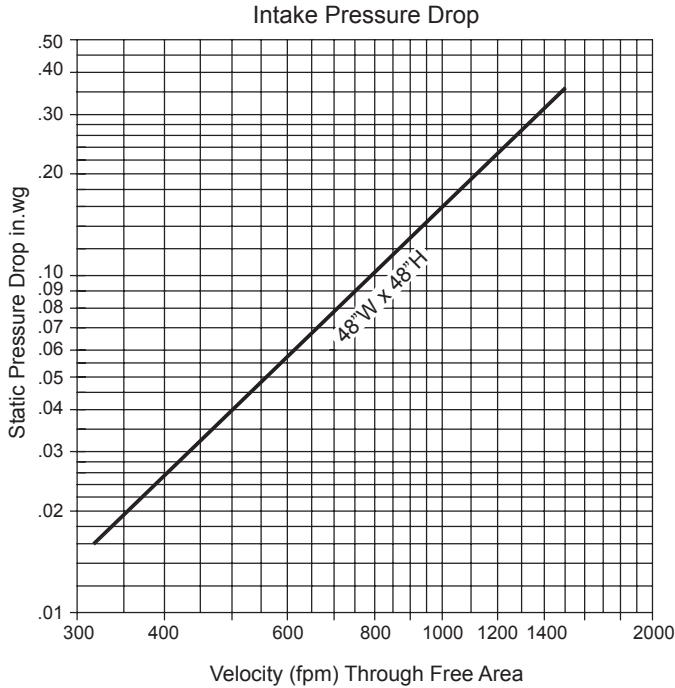

Free Area sq.ft.

		Width						
		12"	18"	24"	30"	36"	42"	48"
Height	12"	0.15	0.27	0.39	0.50	0.62	0.74	0.85
	24"	0.50	0.88	1.26	1.63	2.01	2.39	2.77
	36"	0.85	1.49	2.13	2.77	3.40	4.04	4.68
	48"	1.20	2.10	3.00	3.90	4.80	5.70	6.84
	60"	1.55	2.71	3.87	5.03	6.19	7.35	8.51
	72"	1.90	3.32	4.74	6.16	7.58	9.00	10.43
	84"	2.24	3.93	5.61	7.29	8.98	10.66	12.34
96"	2.59	4.54	6.48	8.42	10.37	12.31	14.26	