

# Extruded Aluminum Louver

**EL62A**

6" Deep • Non-Drainable Blade • Adjustable Louver

## STANDARD CONSTRUCTION

- FRAME:** .080" thick nominal; 6063-T6/T52 extruded aluminum alloy
- BLADES:** .080" thick nominal; 6063-T6/T52 extruded aluminum alloy
- FACE OF LOUVER:** Full width sill and drain head and non-drain blades contained within the drain jambs.
- LINKAGE:** Extruded aluminum, concealed in channel out of airstream. Pivots are .50 dia. machined steel. Cadmium plated and chromate treated. Pivots rotate in a celcon bearing. A .312" dia. Aluminum linkage rod is locked to the pivot by a 1/4 - 20 set screw with epoxy locking patch.
- SHAFT:** .50 DIA. ALUMINUM "Pin-Lock" Rod.
- BLADE SEALS:** Extruded silicone rubber seal at blade edge.
- JAMB SEALS:** Polyurethane
- SCREEN:** 1/2" x .051" flattened aluminum bird screen.
- FINISH:** Mill

## OPTIONS


- Finish - Baked Powder Polyester, Kynar, or Anodize
- Variety of Bird and Insect Screen
- 1 3/8" Usable Flange Frame
- Blank-off Panels
- Actuators (Electric, Pneumatic, Manual, etc.)

## NOTES


1. "A" width and "B" height are opening dimensions. Louver will be provided approximately 1/2" undercut.
2. Shipping weight approximately 5.5 lbs./sq.ft.

## LOUVER SIZE


Panels	Min Panel	Max Single Panel
EL62A	12"W x 12"H	48"W x 96"H

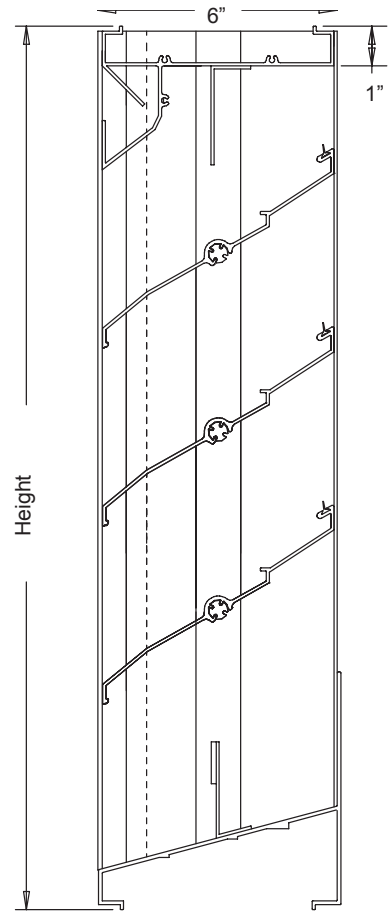



Section View



Optional Flange Frame

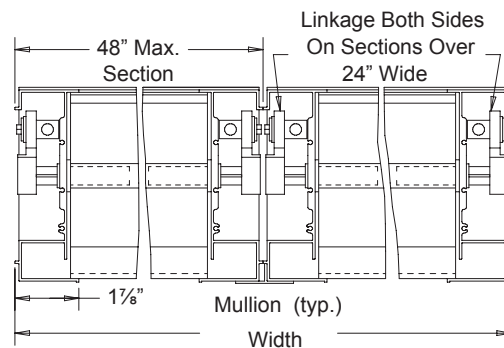

Water Penetration: 800 fpm recommended maximum free area velocity  
 Pressure Drop: 0.15 in.wg at 1000 fpm and 7619 scfm  
 Free Area: 9.06 sq.ft. = 57% for 48"W x 48"H test size

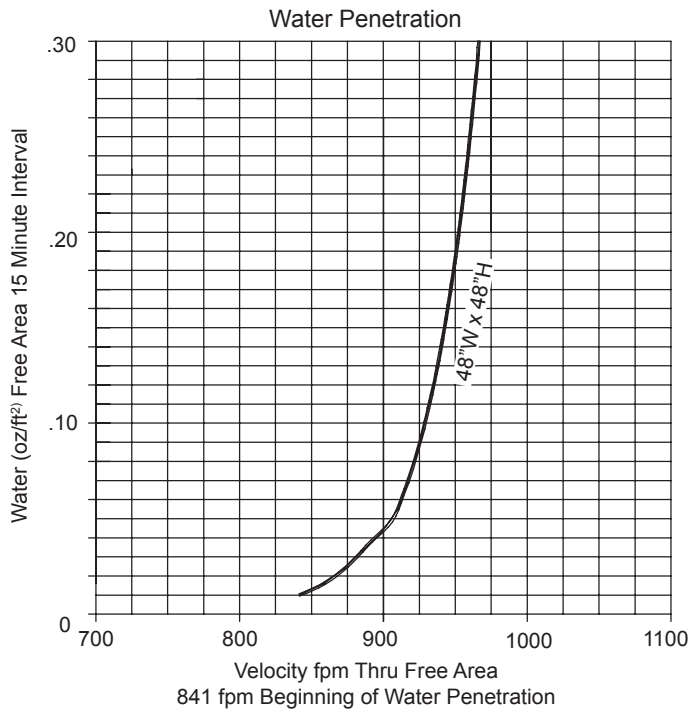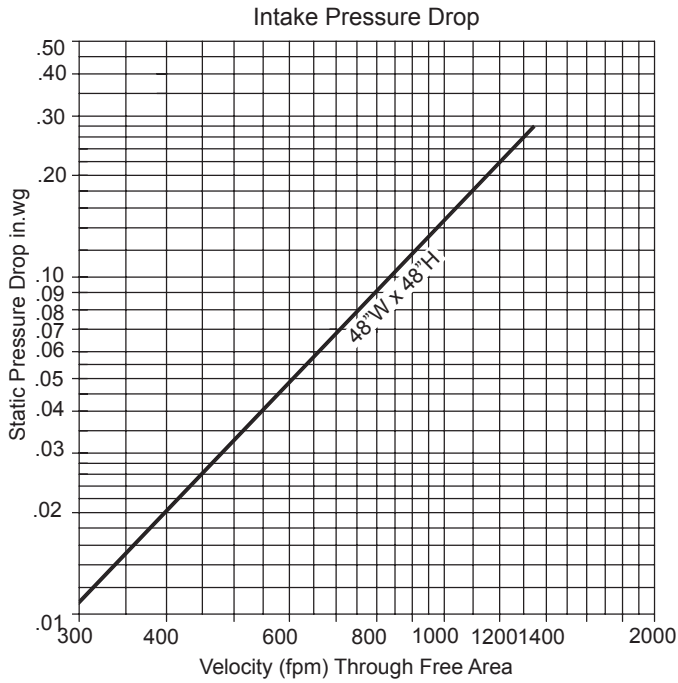

**Free Area sq.ft**

		Width						
		12"	18"	24"	30"	36"	42"	48"
Height	12"	0.21	0.36	0.51	0.67	0.82	0.98	1.13
	24"	0.54	0.94	1.35	1.75	2.15	2.56	2.96
	36"	1.04	1.81	2.59	3.37	4.15	4.92	5.70
	48"	1.53	2.69	3.84	4.99	6.14	7.29	9.06
	60"	1.87	3.27	4.67	6.07	7.47	8.87	10.27
	72"	2.37	4.14	5.91	7.69	9.46	11.23	13.01
	84"	2.86	5.01	7.16	9.31	11.45	13.60	15.75
96"	3.20	5.59	7.99	10.39	12.78	15.18	17.58	