
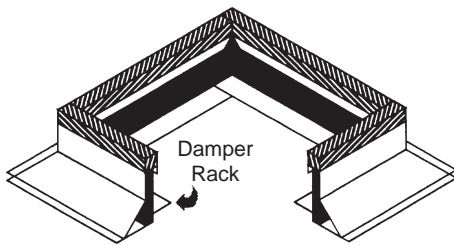



Curb Damper Racks

NOTES


All curb models are available with damper racks. Damper racks are fabricated of the same material and gauge as the curb. Damper rack flanges are located in the bottom of the curb to eliminate interference with equipment mounted on top of the curb. Curb dimensions are specified to the outside perimeter of the top of the curb (A x B). Damper rack dimensions must be specified to the inside dimension of the damper rack flange (A1 x B1)

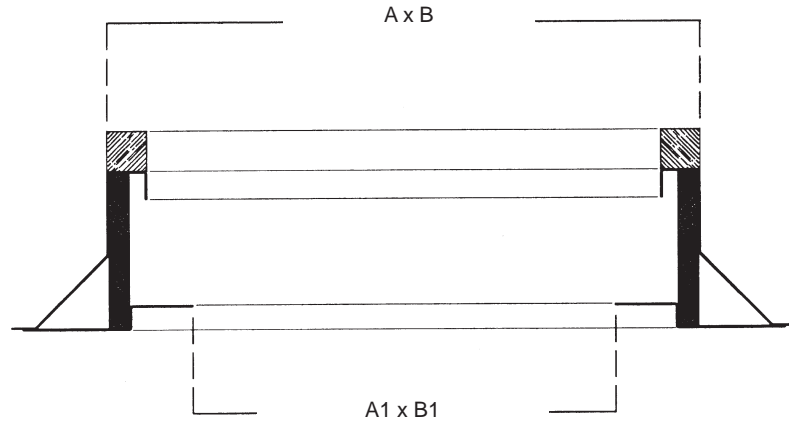

Canted

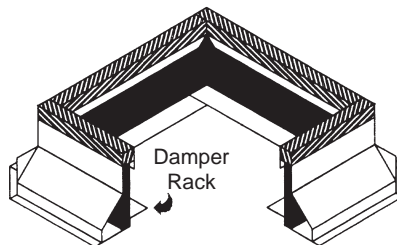

Raised Cant

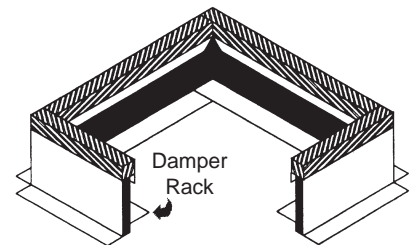

Self Flashing

This page intentionally left blank.