

# Volume Balancing Damper

**L12**

4½" Deep • Single Thickness Blade • Galvanized Steel • Round Balancing Damper

## STANDARD CONSTRUCTION

**FRAME:** 4½" x 20-GA galvanized steel hat channel for dampers ≤ 18" dia.; Dampers ≥ 19" are 20-GA with reinforcing beads or 18-GA galvanized steel.

**BLADE:** Galvanized steel, single thickness blade  
 22-GA for dampers 4" to 12" dia.  
 20-GA for dampers 13" to 18" dia.  
 18-GA for dampers 19" to 24" dia.

**BEARINGS:** Nylon

**AXLES:** ⅜" square plated steel stub, with lanced retainers

**ACTUATOR:** ⅜" square manual locking quadrant, shipped loose

## OPTIONS



2" Stand-Off Kit

## NOTES

1. "A" diameter is opening dimension. Dampers are provided ¼" undercut.
2. Dampers can only be ordered in 1" increments.
3. This model is not recommended for motorized applications.
4. L12 has only one blade and will extend into the airstream in most cases.
5. Maximum face velocity is 1500 fpm. Maximum differential pressure is 1 in.wg.
6. Dampers may be mounted vertically or horizontally.

## DAMPER SIZE

Panels	Min Panel	Max Single Panel
L12	4" dia.	24" dia.

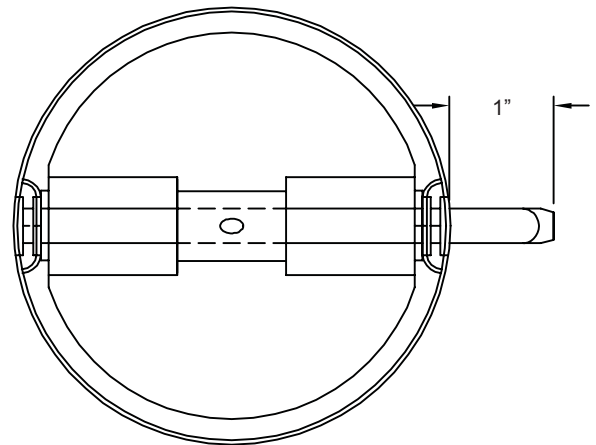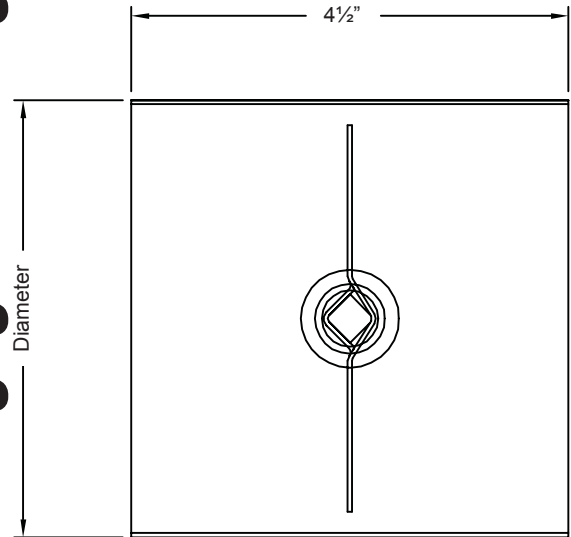

This page intentionally left blank.