

# Model DID200

Steel Control Damper • 4" Deep • Insulated Blades • Parallel Only

## STANDARD CONSTRUCTION

- FRAME:** 16 GA. galvanized steel hat-shaped channel, 4" deep.
- BLADE:** 18 GA. galvanized steel double thickness, 1" thick with styrofoam insulation sandwiched between metal skins, mechanically fastened together. Blades are approximately 6" on centers.
- AXLES:** ½" dia. Cadmium plated steel stub.
- BEARINGS:** Oilite Bronze.
- LINKAGE:** Pivots are .050" dia. steel, Cadmium plated and Chromate treated. A ¼ - 20 set screw with locking patch locks the pivots to a .312" dia. aluminum rod. Pivots rotate in a celcon bearing. Blade linkages are individually adjusted at the factory for maximum shutoff.
- SEALS:** Polyurethane for blade and jamb.
- DRIVE SHAFT:** ½" dia. cadmium plated steel, permanently extended 6" beyond frame for external drive. A blade clip will be provided for internal drive. Please specify location of drive required.
- FINISH:** Mill.

## OPTIONS

- Flanged Frames
- Wider Frames - over 4" deep
- Blades and Frames of other gauges and materials
- Finishes - Enamel, Epoxy, etc.
- Seals - Stainless steel for jambs only

## NOTES

1. ¼" nominal deduction will be made to the opening size given.
2. This damper is only available with a parallel blade configuration.
3. Approximate shipping weight is 7.0 lbs per sq.ft.

## DAMPER SIZES

Min Panel	Max Single Panel
10"W x 8¾"H	48"W x 72"H



## INSULATING FACTORS

For above construction

R-Value = 4

U-Factor = .25 BTU per hour per square foot per °F

The above values are based on calculations considering the face area of the damper only. This does not include the frames. Insulation of the damper frame shall be by others.

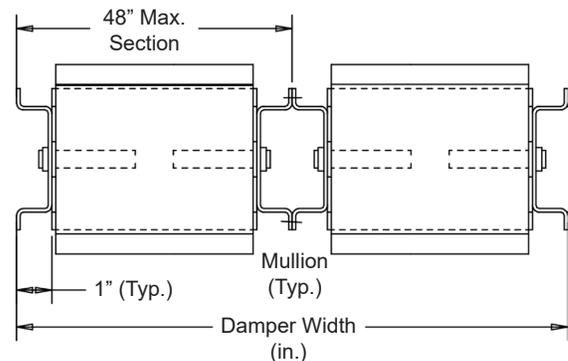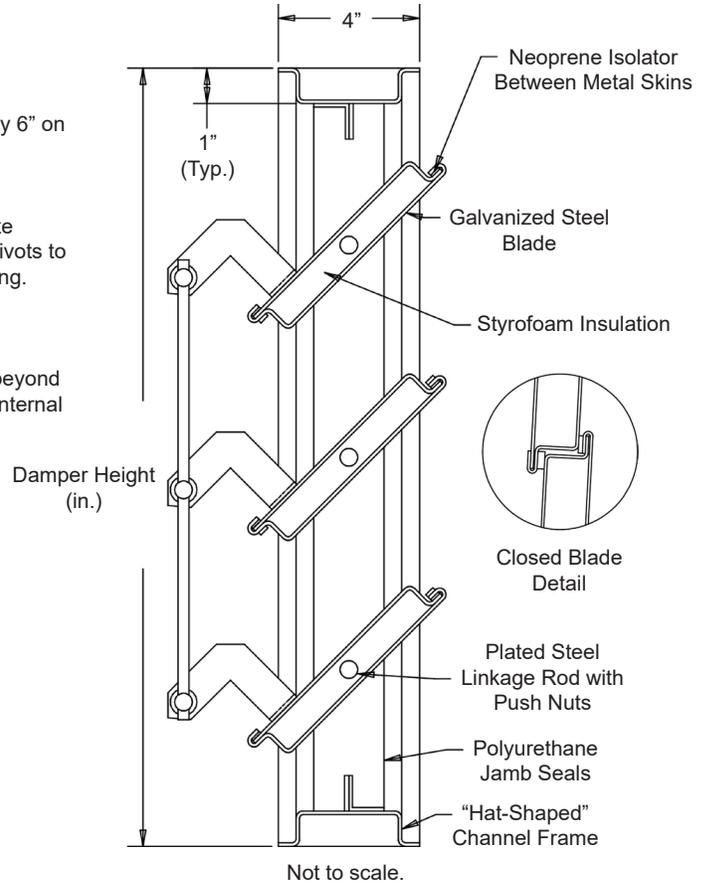

Item #	Qty	Width	Height	Width	Height	Union Made
		Opening Size		Damper Size		
<b>Arch. / Eng.:</b>						
<b>Contractor:</b>						
<b>Project:</b>						
<b>EDR:</b>		<b>ECN:</b>		<b>Job:</b>		
<b>Date:</b>		<b>DWN:</b>		<b>DWG:</b>		

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286

