

GRAVITY VENTILATOR

AGV

STANDARD CONSTRUCTION

Low Profile
Formed Aluminum

MATERIAL

Hood is of .063" aluminum and throat and curb cap are of .080" thick extruded aluminum, alloy 6063-T5. Exterior corner bracing is 3/4" x 3/4" x 1/8" extruded aluminum angle 6063-T5 alloy. Internal support bracing is 1" x 2" x 1" extruded aluminum channel. Additional support bracing is added when either hood dimension exceeds 47". Hoods built in sections are of .063" aluminum and include adequate additional support bracing.

ASSEMBLY


All hoods are mechanically fastened to the throat. Bracing is solid welded through out. Curb cap joints are solid seal welded to prevent leakage.

SCREEN

1/2" bird screen mechanically fastened to underside of hood.

FINISH

Mill finish.

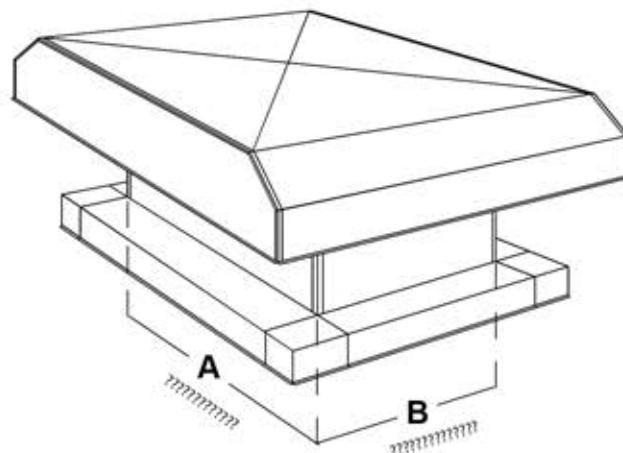


FREE AREA and MODELS

100% (1:1)
Exhaust

200% (2:1)
Intake

AGV-1

AGV-2

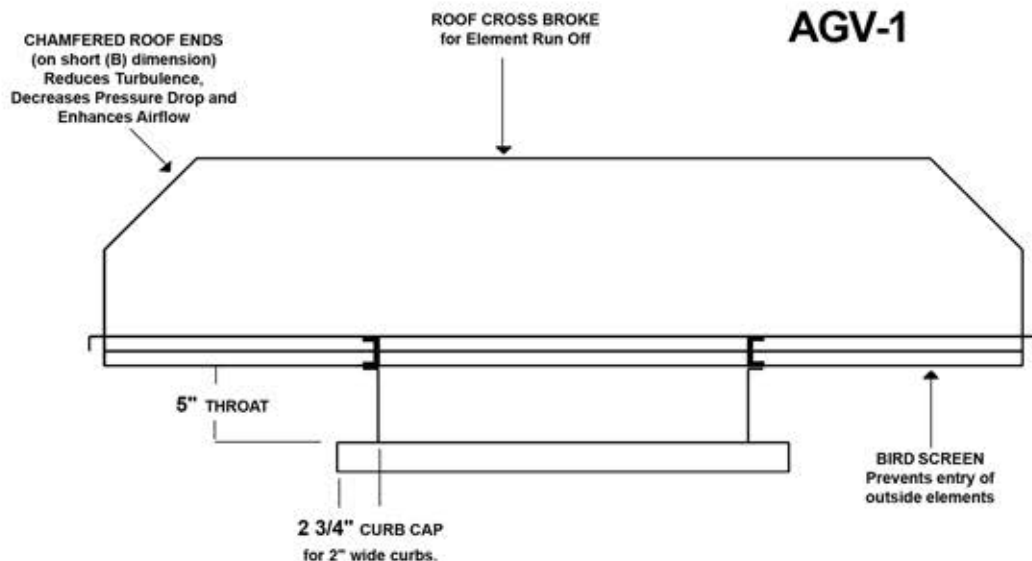

Model	'A' (throat width)	'B' (throat width)	Qty	Options / Accessories / Variations

PROJECT _____

LOCATION _____

ARCH/ENGR _____

CONTRACTOR _____

REPRESENTATIVE _____

DATE _____

PC00051(1) - July 2009

GRAVITY VENTILATORS


ID Louvers & Dampers

A DIVISION OF MESTEK, INC.

450 Riverside Drive Wyalusing, PA 18853 Phone: 570-746-1888 Fax: 570-746-9286

HOOD DIMENSIONS

- Find dimensions A x B in selected Free Area sizing chart to determine overall hood height and width.
- Standard throat height is 5" (other heights are available). To determine overall ventilator height add 'C' dimension and throat height (5").
- Standard curb cap is 2 3/4" (other sizes are available).
- Sizes with dimensions in reverse will ship in multiple sections and require field assembly.

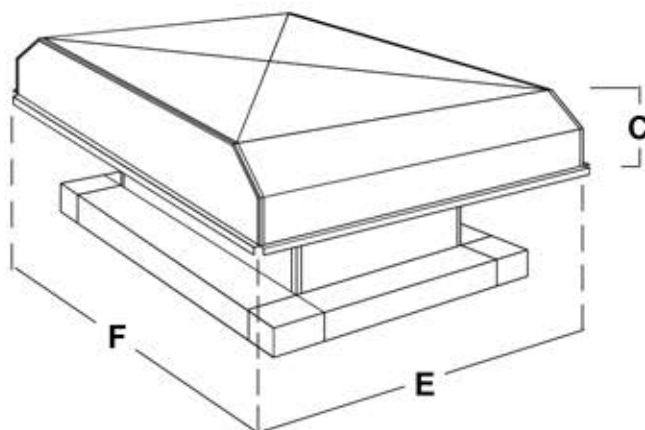

		A Dimension (LONG throat width) Square End															
		12"	14"	16"	18"	20"	24"	30"	36"	42"	48"	54"	60"	66"	72"		
B Dimension (SHORT throat width) Chamfered End	12" C	4	4	4	4	5	5	5	5	5	5	5	6	6	6	6	
	12" E	20	20	20	19	19	19	18	18	18	18	18	18	18	18	18	
	12" F	20	23	27	28	31	37	44	53	61	70	79	87	96	105		
	14" C		5	5	5	5	5	5	5	6	6	6	6	6	7	7	
	14" E		23	22	22	22	21	21	21	21	21	21	21	21	21	21	
	14" F		23	25	28	31	35	44	53	61	70	79	87	96	105		
	16" C			5	5	6	6	6	6	6	6	6	7	7	7	7	
	16" E			25	25	24	24	24	24	24	24	24	24	24	24	24	
	16" F			25	28	29	35	44	53	61	70	79	87	96	105		
	18" C				6	6	6	6	7	7	7	7	7	7	8	8	
	18" E				26	26	26	26	26	26	26	26	26	26	26	26	
	18" F				27	29	35	44	53	61	70	79	87	96	105		
	20" C					7	7	7	7	7	7	7	8	8	8	8	
	20" E					29	29	29	29	29	29	29	29	29	29	29	
	20" F					29	35	44	53	61	70	79	87	96	105		
	24" C						8	8	8	9	9	10	10	10	11	11	
	24" E						35	35	35	35	35	35	35	35	35	35	
	24" F						35	44	53	61	70	79	87	96	105		
	30" C							9	10	10	11	11	11	12	12	12	
	30" E							44	44	44	44	44	44	44	44	44	
	30" F							44	53	61	70	79	87	96	105		
	36" C								11	12	12	12	13	13	13	13	
	36" E								52	52	52	52	52	52	52	52	
	36" F								53	61	70	79	87	96	105		
	42" C									13	13	14	14	14	15	15	
	42" E									58	58	58	58	58	58	58	
	42" F									64	73	83	92	101	110		
	48" C										15	15	16	16	17	17	
	48" E										70	70	70	70	70	70	
	48" F										70	79	87	96	105		
	54" C											16	17	17	18	18	
	54" E											78	78	78	78	78	
	54" F											79	87	96	105		
	60" C												18	19	19	19	
	60" E												87	87	87	87	
	60" F												87	96	105		
	66" C													20	20	20	
	66" E													93	93	93	
	66" F													99	108		
	72" C														22	22	
	72" E														93	93	
	72" F														118	118	

100% (1:1)
Exhaust

NOTE: FRACTIONS ARE ROUNDED

		A Dimension (LONG throat width) Square End															
		12"	14"	16"	18"	20"	24"	30"	36"	42"	48"	54"	60"	66"	72"		
B Dimension (SHORT throat width) Chamfered End	12" C	5	5	5	5	6	6	6	6	6	6	7	7	7	7	7	
	12" E	23	23	23	22	22	22	22	22	22	22	22	22	22	22	22	
	12" F	23	27	31	33	37	44	53	64	74	85	96	106	117	127		
	14" C		6	6	6	6	6	6	7	7	7	7	7	7	8	8	
	14" E		27	26	26	26	25	25	25	25	25	25	25	25	25	25	
	14" F		27	30	33	37	43	53	64	74	85	96	106	117	127		
	16" C			6	6	7	7	7	7	7	7	8	8	8	8	8	
	16" E			30	30	29	29	29	29	29	29	29	29	29	29	29	
	16" F			30	33	36	43	53	64	74	85	96	106	117	127		
	18" C				7	7	7	7	8	8	8	8	8	8	9	9	
	18" E				32	32	32	32	32	32	32	32	32	32	32	32	
	18" F				32	36	43	53	64	74	85	96	106	117	127		
	20" C					8	8	8	8	8	8	9	9	9	9	9	
	20" E					36	36	36	36	36	36	36	36	36	36	36	
	20" F					36	43	53	64	74	85	96	106	117	127		
	24" C						9	9	9	10	10	11	11	11	12	12	
	24" E						43	43	43	43	43	43	43	43	43	43	
	24" F						43	53	64	74	85	96	106	117	127		
	30" C							10	11	11	12	12	12	13	13	13	
	30" E							53	53	53	53	53	53	53	53	53	
	30" F							54	64	74	85	96	106	117	127		
	36" C								12	13	13	13	14	14	14	14	
	36" E								59	59	59	59	59	59	59	59	
	36" F								70	81	93	104	116	117	127		
	42" C									14	14	15	15	15	16	16	
	42" E									74	74	74	74	74	74	74	
	42" F									74	85	96	106	117	127		
	48" C										16	16	17	17	18	18	
	48" E										85	85	85	85	85	85	
	48" F										85	96	106	117	127		
	54" C											17	18	18	19	19	
	54" E											93	93	93	93	93	
	54" F											98	108	119	130		
	60" C												19	20	20	20	
	60" E												93	93	93	93	
	60" F												120	132	144		
	66" C													21	21	21	
	66" E													93	93	93	
	66" F													146	159		
	72" C														24	24	
	72" E														117	117	
	72" F														144	144	

200% (2:1)
Intake

NOTE: DIMENSIONS ARE ROUNDED
NOTE: "C" DIMENSION IS PLUS .25

STATIC PRESSURE LOSS (inches w.g.)

Throat Velocity	100%	200%	
	EXHAUST	INTAKE	EXHAUST
300 fpm	.012"	.018"	.008"
400 fpm	.021"	.031"	.013"
500 fpm	.033"	.049"	.021"
600 fpm	.048"	.071"	.030"
700 fpm	.065"	.096"	.041"
800 fpm	.085"	.126"	.053"
900 fpm	.108"	.159"	.068"
1000 fpm	.133"	.196"	.084"
1100 fpm	.161"	.237"	.101"
1200 fpm	.192"	.282"	.120"

FORMULAS

1) HOOD VELOCITY (fpm)

$$\text{Throat Velocity (FPM)} = \begin{matrix} 1 & (100\% \text{ Free Area}) \\ 2 & (200\% \text{ Free Area}) \end{matrix}$$

2) THROAT VELOCITY (fpm)

$$\text{Hood Velocity (FPM)} \times \begin{matrix} 1 & (100\% \text{ Free Area}) \\ 2 & (200\% \text{ Free Area}) \end{matrix}$$

3) THROAT SIZE (square feet)

$$\text{Air Flow (CFM)} \div \text{Throat Velocity (FPM)}$$

4) THROAT PERIMETER (inches)

$$A + A + B + B$$

SIZING RECOMMENDATIONS

- 1) On **INTAKE** Gravity Ventilators, the **Hood Velocity** should not exceed **600 fpm**.
- 2) To size a **2" Curb** using the standard gravity ventilator curb cap of 2 3/4", add **throat size + 4"** to allow for the curb cap distance from the throat with adequate installation allowance.

OPTIONS / ACCESSORIES

SCREENS

A wide variety of Bird or Insect screens are available in various gauges and mesh dimensions including a snow screen.

MATERIAL

Aluminum thickness in .063" or .081" on hood.

CURB CAP

Standard is 2 3/4" for 2" curbs, although by specifying, curb cap is available in any size.

THROAT OPTIONS

Standard exposed throat height of 5" can be extended to any selected height. Hoods (throat sizes up to 60" x 60") can be hinged to throat for swing open access from one side or split horizontally creating two sections for lift up access.

INSULATION/ANTI CONDENSATE

Mastic coating is available on the underside of the hood or insulation (1" or 2") can be installed in either the hood or the throat.

HEAVY CONSTRUCTION

For high wind area applications, our high wind loading option assures your gravity ventilator will remain intact under wind conditions up to 125 mile per hour.

DAMPER MOUNT

Dampers can be mounted horizontally in the throat or vertically around the inside perimeter of the hood.

FILTERS AND RACKS

1" or 2" filters and racks, available in Disposable or Washable (Note: disposable available on specific sizes only).

FINISHES

A wide selection of finishes including Baked Enamel, Epoxy and Prime Coat.